


SUPPRESSION TANK: -TANK-FC/SA (D1000)

UNIT DIMENSIONS

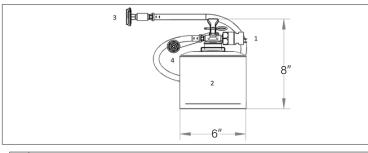


	1	Tank is Equipped with a Pressure Switch which opens on discharge.	
	2	Tank is of Stainless Steel Construction.	
	3	Visual Pressure Gauge.	
ſ	4	Discharge Hose with Quick Connect fitting attached.	


NOZZLE PLACEMENT (PRE-INSTALLED IN HOOD)

FC SPECIFICATIONS

Туре	Self Contained Fire Suppression System
Compliance	UL-1995
Mounting Configuration	Integral to the hood
Weight	9.4 lbs
Vessel	Stainless Steel
Chemical Type	Amerex 660
Volume	1300 mL
Chemical Weight	2.2 lbs
Pressure (PSI) +-8%	102 PSI
Height	8 in
Width	6 in

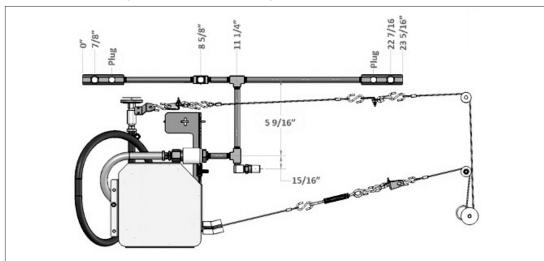

TANK LOCATION

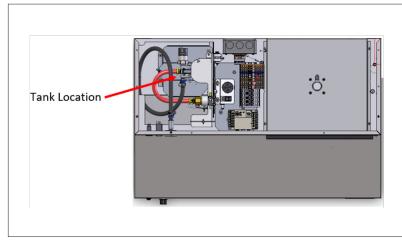

SA SPECIFICATIONS

Туре	Self Contained Fire Suppression System
Compliance	UL-1995
Mounting Configuration	Integral to the hood
Weight	9.4 lbs
Vessel	Stainless Steel
Chemical Type	Amerex 660
Volume	1300 mL
Chemical Weight	2.2 lbs
Pressure (PSI) +-8%	Charge to 102 PSI on site
Height	8 in
Width	6 in

